



SWITCH MODE POWER SUPPLY

PS12-8A

APPLICATIONS

Robotics


Automation Panel

Elevators

Special Purpose Machine




Mechanical Dimensions

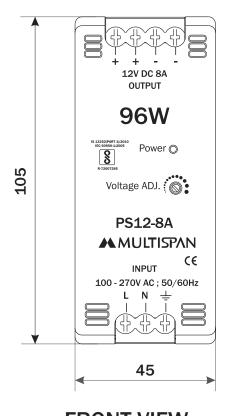

FRONT VIEW

All dimensions are in mm

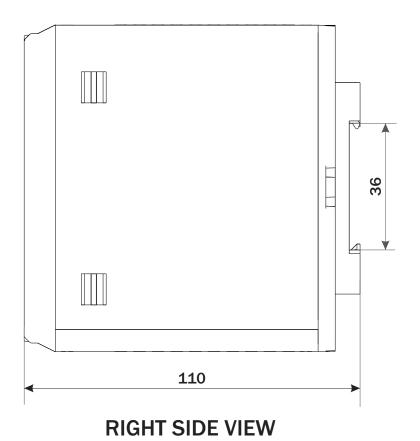

TECHNICAL DATA



Features		
96W rated power		
Compact Size		
LED Indicate For Power ON		
Din Rail Mount		
Cooling by free air convection		
Protection Available		
 Overload, Over voltage, Output short circuit, Over Temperature 		

Input Specification		
Supply Voltage	100 to 270V AC±10%,(L-N)	
Frequency Range	50/60 Hz	
AC Current (TYP.)	1.6A@100V AC 0.74A@270V AC	
Efficiency (TYP.)	>85%@230VAC	
Start UP time	<1 sec@230VAC & <3 sec@100VAC (Full Load)	

Output Specification		
Output Voltage	11.50-13.50V DC	
Output Current	8A at 12V; 7.1A at 13.50V	
Ripple & noise	<1% of V out	
Line Regulation	±1%	
Load Regulation	±1%	
Hold UP Time	<60ms at 230VAC & >15ms at 100VAC (Full Load)	

LED Indication			
LED 1	Power On		

Protection	
Input Fused	3.15A -250V AC Internal
Output Over Load	110% to 120% of rated Output Current protection Protection Type :Hiccup mode;recover automatically after fault condition is removed
Output Short Circuit	Hiccup mode when output is shorted; Recovers automatically after fault condition is removed.
Output Over Voltage	SMPS Latches off if output voltage Exceeds the specified output voltage Limits.
Over Temperature	Power supply shuts down when the temperature goes above specified limit; Turns on automatically after temperature goes back to Normal operating conditions.
Isolation between Input and Output:	2.5 KV

Environmental		
Working Temperature	-25°C to 50°C * De-rate output power at 3w/°C above +50°C Ambient	
Storage Temperature	-40°C to 85°C	
Relative Humidity	95% RH Non-condensing	

Mechanical Characteristics		
Dimension (H) x (W) x (D)	DIN Rail Mount: 105 x 45 x 110	
Material Front	ABS	
Enclosure	Aluminum	
Screw	M3	
Torque (Max)	0.5 N-m	
Wire Gauge	26 - 10 AWG	
Weight (Approx)	Unpacked : 425g Packed : 460g	

PS12-8A Switch Mode Power Supply

www.multispanindia.com