

MULTISPAN

Product Manual

Photo Control Unit

MPC-1062L



Multispan Control Instruments Pvt Ltd


72/B, Phase 1, GIDC Estate, Vatva, Ahmedabad-382445, Gujarat, India.

+91-79-40029250

+91-9978991471

marketing@multispanindia.com

www.multispanindia.com

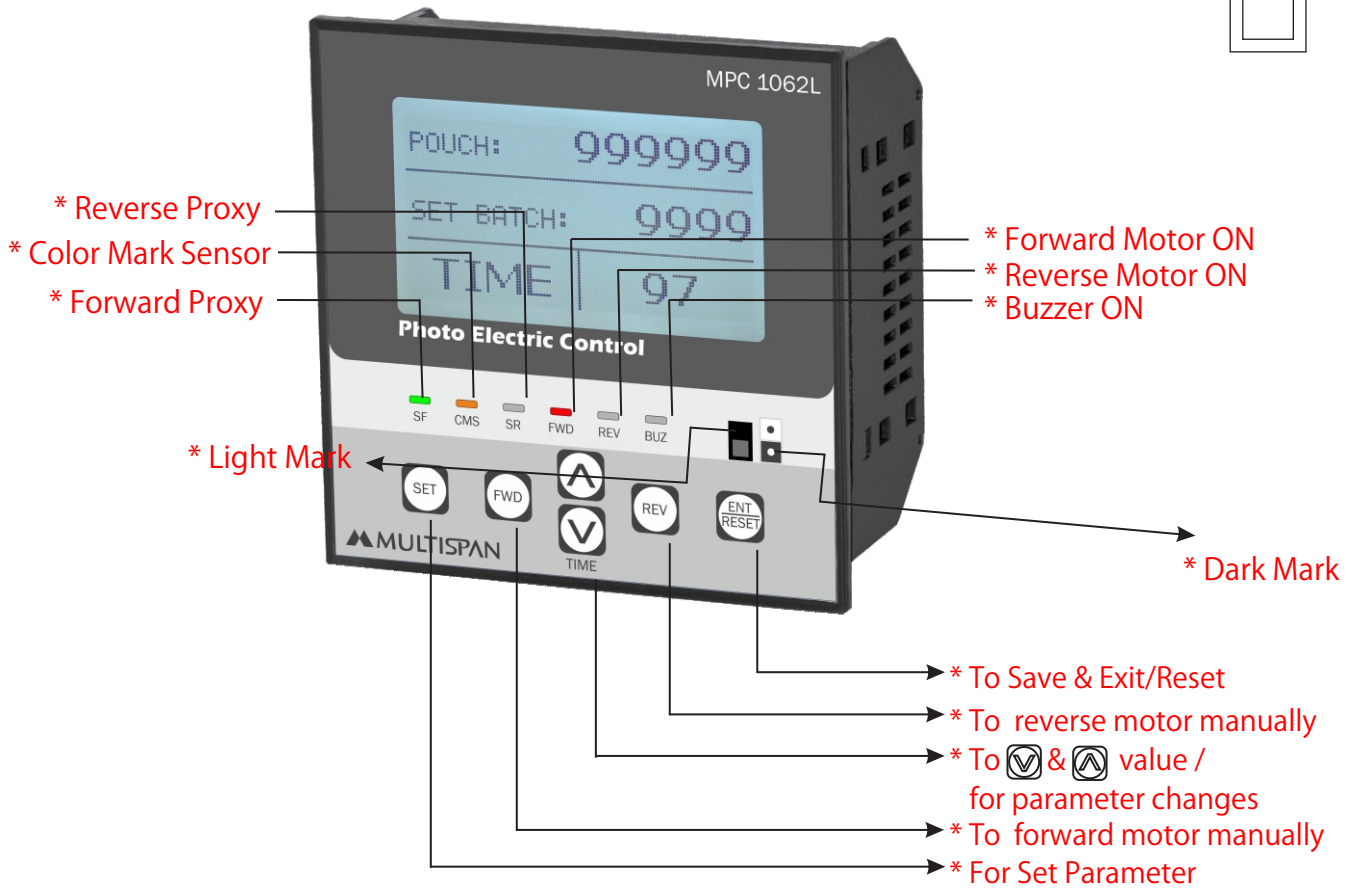

Technical Specification

Model	MPC-1062L
Display	Graphical Display
Size (mm)	96 (H) X 96 (W) X 65 (D) mm
Panel Cutout	92 X 92 mm
Range	0 - 999999 Batch count 0 - 99 Milli second forward & reverse
Input	2 NPN Proxy for forward & reverse NPN/PNP color mark sensor
Output	230V AC for control winding 230V AC for main winding & Buzzer
Power Supply	230V AC,50/60 Hz
Reset	Reset at front
memory	Non Volatile
Operating Temperature	0° C To 55° C
Relative Humidity	Up to 95% RH Non Condition
Protection Level	IP-65 (Front side) As per IS/IEC 60529 : 2001

Working

- 1). When the pulse from the forward proxy and then pulse from Photocell at the same time then motor runs in the forward direction.
- 2). When the pulse from the reverse proxy and then pulse from Photocell at the same time then motor runs in the reverse direction.
- 3). In healthy or running condition, the pulse from forward proximity, photocell and then same reverse proximity is sensed one by one.
- 4). The photo sensor is connected as the input to the photo controller and also the two proximity switches are also connected as input for sensing.
- 5). Depending upon the conditions mentioned above the photo controller will give the signal accordingly to move the motor either in forward or reverse direction.
- 6). If any mismatch occur during packing time then the controller adjust mismatch by pressing **(FOR)** & **(REV)** key.

Parameter Setting

* **Power on instrument. Display will show**

POUCH	19
SET BATCH	2
TIME	98

- * Press **(SET)** key for 2 sec, to set batch count. it is selectable 000001-999999 count Change By **(V)** & **(^)** key. To save & exit, Press **(ENT RST)** key

SET BATCH
0002


Buzzer Turns on at set batch count

- * Press **(SET)** key for 4 sec, to set relay (Buzzer) on time selectable 0-99.9 second change by **(V)** & **(^)** Key To save & exit, Press **(ENT RST)** key

SET BUZ TIME
5.0 SEC

Buzzer remains on for preset relay time

Connection Diagram

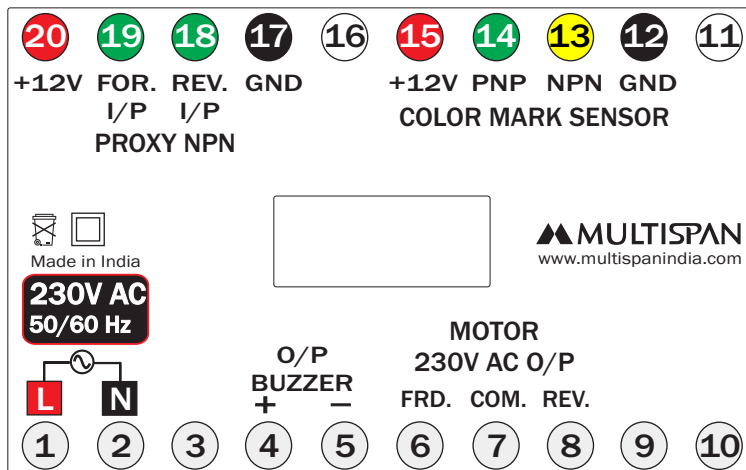

Product improvement and upgrade is a constant procedure. So for more updated operating information and support, Please contact our helpline : +91-9978991474/76/82 or Email at service@multispanindia.com Ver: 1904