

PFLC-68

Fully Pneumatic Packaging Controller



Features

- Touch Screen
- RTC Facility
- Field operated used friendly menu for device configuration
- With password protected resetting

Specification

Input	Clutch Proxy (PNP) Unwinding Motor Start Proxy (NPN) Eye Mark Sensor Proxy
Relay Output	RLY-1 Horizontal seal RLY-2 Vertical seal RLY-3 Cutter RLY-4 Nitrogen fill RLY-5 Batch cutter RLY-6 Batch coding RLY-7 Auger RLY-8 Unwinding
Relay Type	(NO-C)
Relay Rating	5A,230V AC
Clutch & Break Output	24V DC
Power Supply	24V DC (6VA Max.)


Key

KEY	RESET
-----	-------

Dimension

Size	96 (H) x 96 (W) x 54 (D)
Panel Cutout	92 (H) x 92 (W)

Terminal Connection

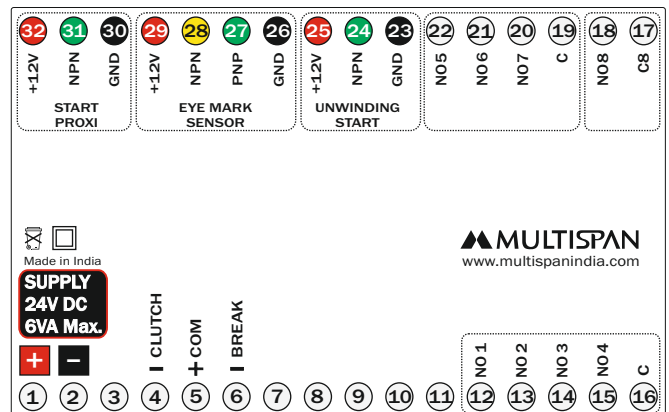

Multispan Control Instruments Pvt. Ltd.

72/B,Phase 1, GIDC Estate,Vatva,Ahmedabad-382445,Gujarat,India.

+91-7575805463/7623001206

support@multispanindia.com

Follow us



www.multispanindia.com