



16 CHANNEL SCANNER

MS-5716

APPLICATIONS

Motor Protection

Generator
Monitoring & Protection

Electrical Sub-station monitoring


Metal and Mining applications

Power Distribution Panel

Laboratory Equipment Monitoring

Mechanical Dimensions

Body Dimensions

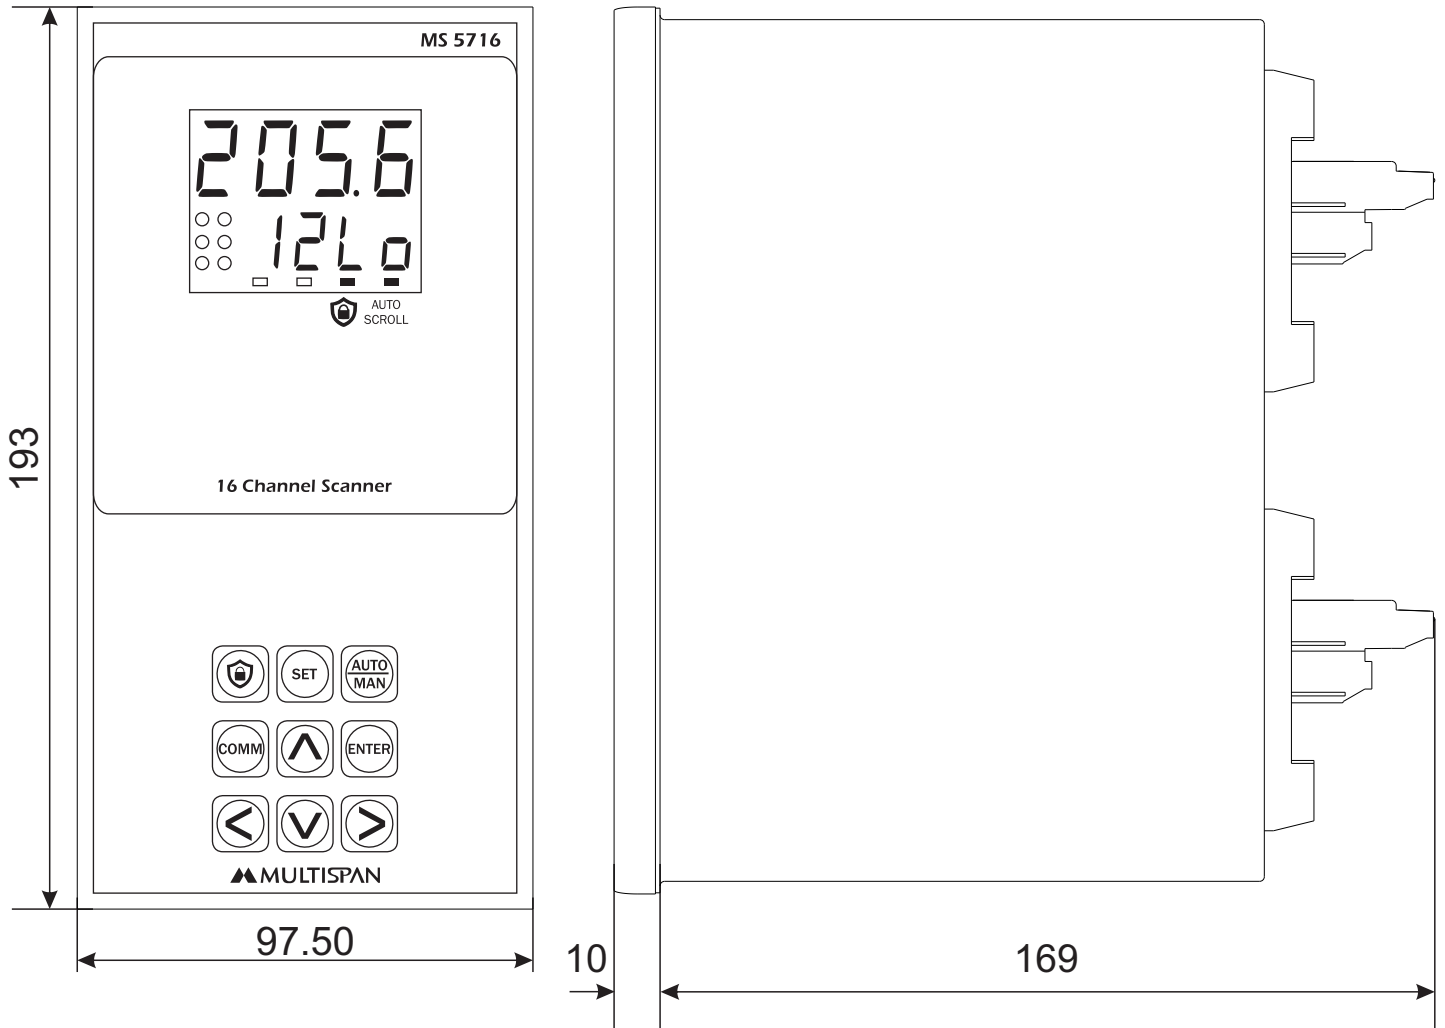



FRONT VIEW

All dimensions are in mm


RIGHT SIDE VIEW

Connection Diagram

Panel Cutout

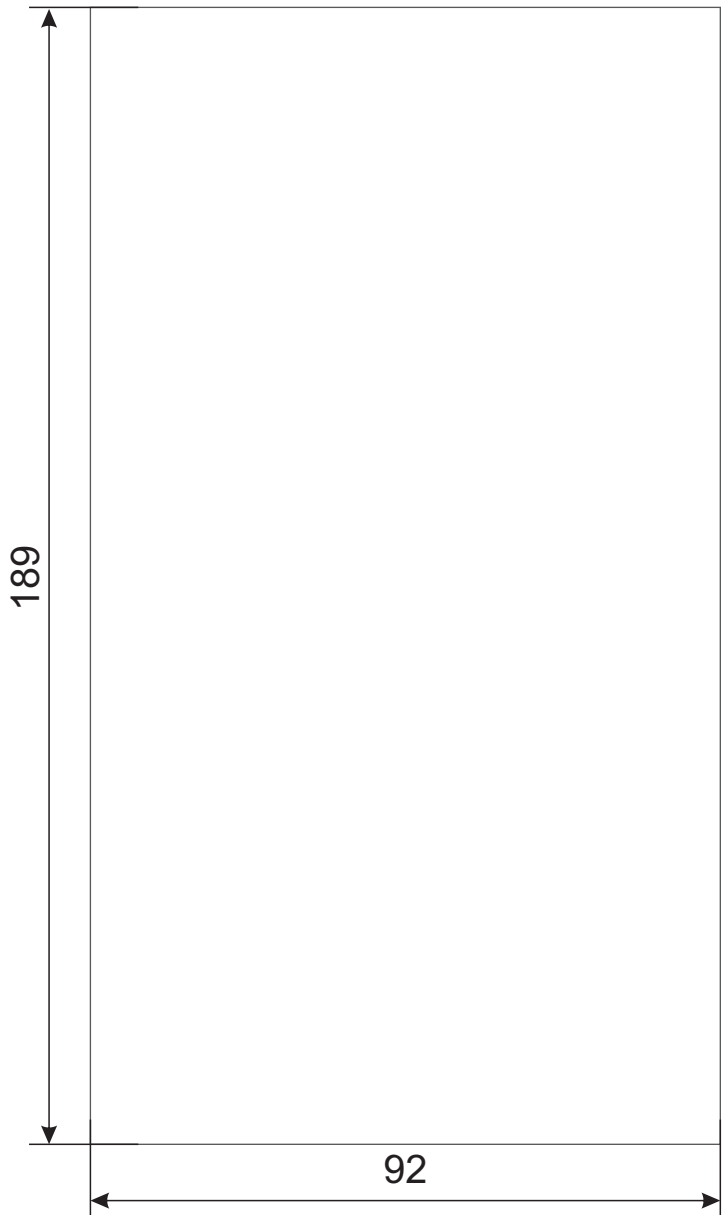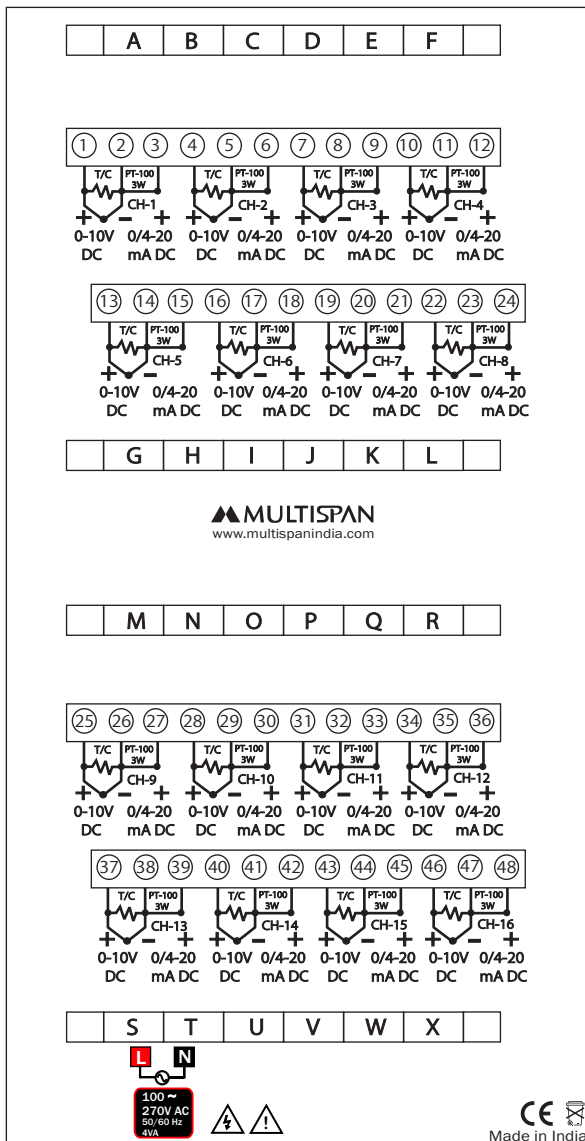

TECHNICAL DATA

Input	Thermocouple	J / K
	RTD	PT-100 3 Wire / Pt.1
	Analog	0-10V DC/ 0-20mA DC/ 4-20mA DC (Configurable)
Range	J: 0 to 600° C, K: 0 to 1200° C PT-100: -99° C to 400° C , PT.1: -99.0° C to 400.0° C Analog : -999 to 9999	
Power Supply	100 to 270V AC (SMPS) ,50/60Hz,Approx 4VA 24V DC Available as per requirement	
Accuracy	± 1 % FSD	
Certification		

Input	
ADC Resolution	12 Bit
Display Resolution	Thermocouple : 1° C RTD : For PT-100 :1° C / For PT.1 : 0.1° C
Sampling Rate	250 mS / Channel

Power Supply	
Standard	100 - 270V AC @ 50/60Hz
Optional	24V DC
Consumption	4VA

Input Range	
Input Type	Range
J	0 to 600° C
K	0 to 1200° C
PT-100	-99 to 400° C
PT.1	-99.0 to 400.0° C
4-20 mA DC	-999 to 9999
0-20 mA DC	-999 to 9999
0-10 V DC	-999 to 9999

Display	
Process Value	Upper : 0.70" 4 Digit Red LED 7 Segment Display
Channel No. and Relay Status	Lower : 0.50" 4 Digit Green LED 7 Segment Display

Keys
9 controlling keys for configuration , operation and Controlling

Accuracy

J , K , PT-100 , PT.1	± 1 % FSD for J, K ± 0.5% for PT-100 , PT.1
CJC error	±2 °C
Sensor Open	J , K ,PT-100 , PT.1
T/C Burnout current	1.10uA
RTD excitation current	0.2mA
CMRR	> 120 db (Typical)
Input Impedance	> 1 M Ω
Max Voltage	20V DC

Environmental Characteristics

Working Temperature	0 to 55 °C
Storage Temperature	0 to 55 °C
Relative Humidity	95% RH Non-condensing
Ingress Protection	IP 65 (Front Side)

Mechanical Characteristics

Mounting Type	Panel Mount
Dimension (HxWxD) mm	193 x 97.5 x 169
Panel Cutout (HxW) mm	189 x 92
Material	Enclosure Front
	Mild Steel (Powder coated) ABS
Terminal Screw Size	M3.5
Screw Torque (N.m)	1
Wire Guage (AWG)	26-14
Weight (Approx) gms	Unpacked : 1100 Packed : 1400
Accessories	1 Pair of Clamps