



COUNT TOTALIZER

CT-1000

APPLICATIONS

Packaging Machinery

Extrusion Machinery


Furnace & Boilers

Ovens & Incubators

Food Industry


Mechanical Dimensions

Body Dimensions

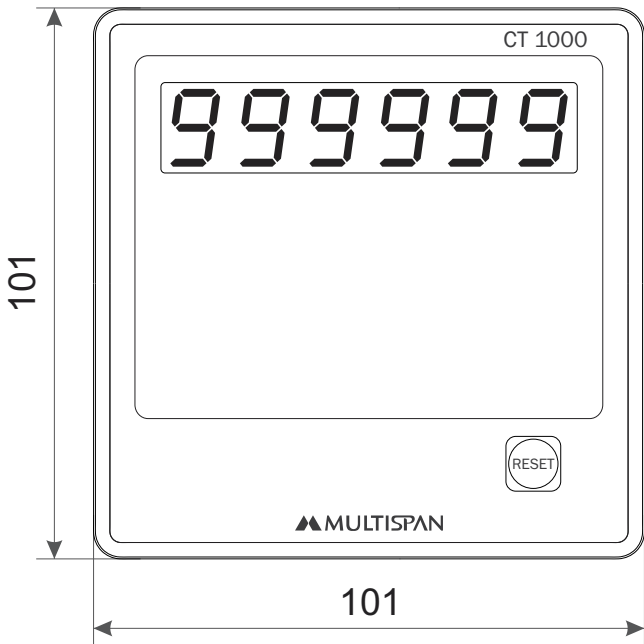


FRONT VIEW

All dimensions are in mm

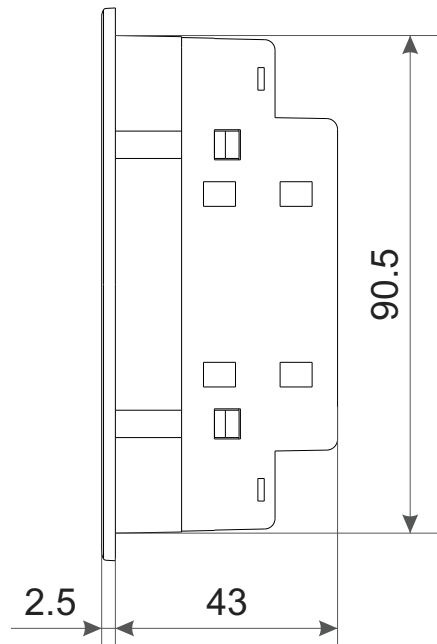


RIGHT SIDE VIEW

Connection Diagram

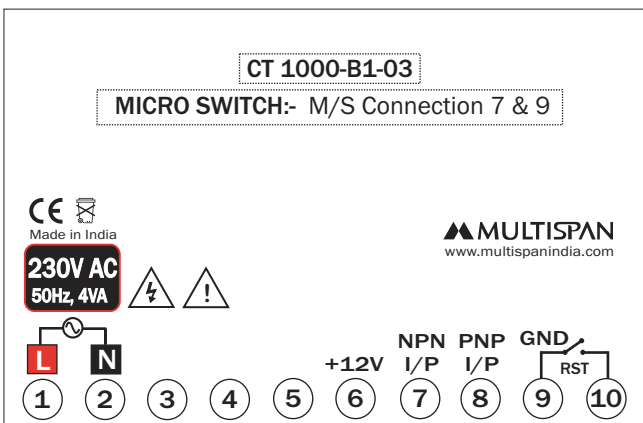

Panel Cutout

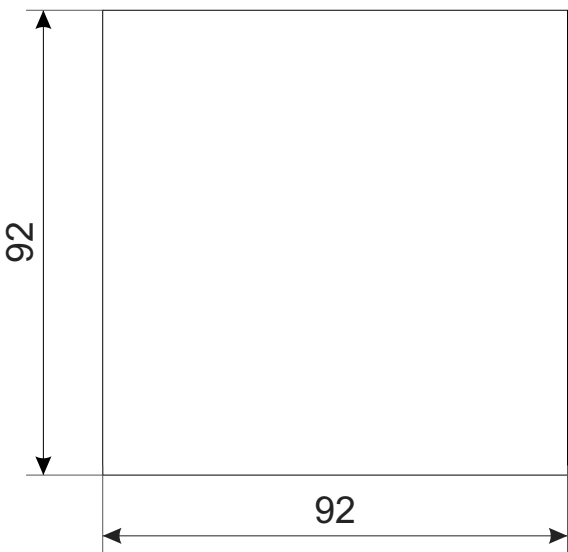

TECHNICAL DATA

Input	NPN/PNP Proximity
Range	0-999999 Count
Power Supply	230V AC, $\pm 10\%$, 50Hz
Certification	CE UK CA

Input

Input Type	NPN/PNP Proximity
Function	Front & Back Reset

Environmental Characteristics

Working Temperature	0 to 55 °C
Storage Temperature	0 to 70 °C
Relative Humidity	95% RH Non-condensing
Protection (As per Request)	IP-65 (Front Side)

Power Supply

Standard	230V AC, 50Hz
Consumption	4VA

Mechanical Characteristics

Mounting Type	Panel Mount
Dimension (HxWxD) mm	101 x 101 x 43
Panel Cutout (HxW) mm	92 x 92
Material	Front Enclosure Polycarbonate (PC) ABS
Terminal Screw Size	M3.5
Screw Torque (N.m)	0.5
Wire Gauge (AWG)	26-14
Weight (Approx) gms	Unpacked : 235 Packed : 290
Accessories	1 Pair of Mounting Clamps

Display

Process Value	6 Digit 7 seg 0.56", RED LED Display
Keys	RESET