



COUNT TOTALIZER

CT 5000

APPLICATIONS

Packaging Machinery

Extrusion Machinery


Furnace & Boilers

Ovens & Incubators

Food Industry


Mechanical Dimensions

Body Dimensions

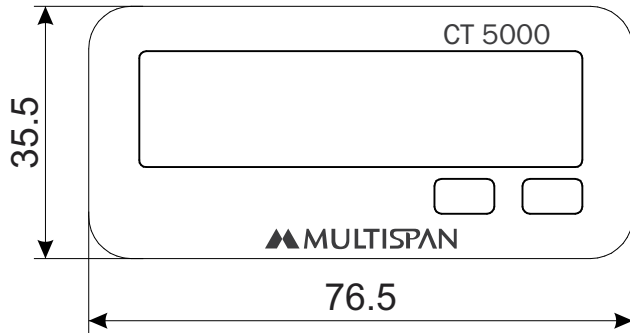


FRONT VIEW

All dimensions are in mm

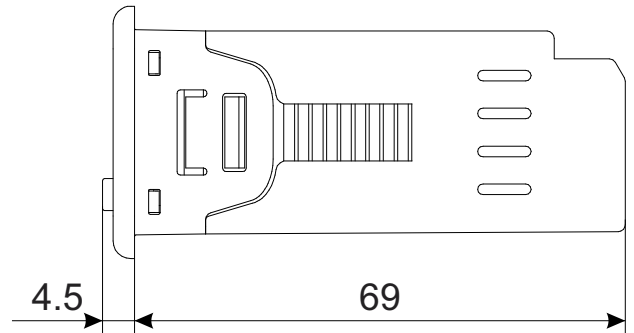


RIGHT SIDE VIEW

Connection Diagram

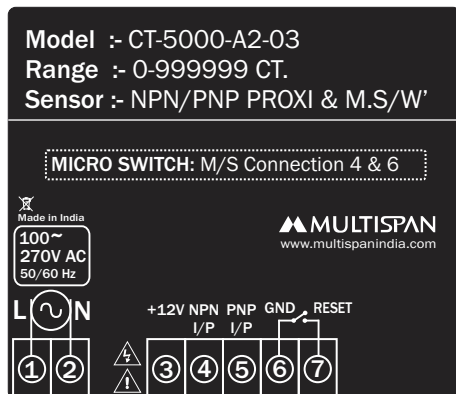

Panel Cutout

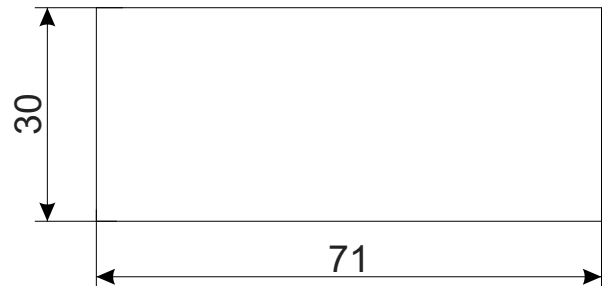

TECHNICAL DATA

Input	NPN/PNP Proximity
Range	0-999999 Count
Power Supply	100-270V AC,50/60Hz

Input

Input Type	NPN/PNP Proximity
-------------------	-------------------

Environmental Characteristics

Working Temperature	0 to 55 °C
Storage Temperature	0 to 55 °C
Relative Humidity	95% RH Non-condensing
Protection (As per request)	IP65 (Front Side)

Display LED & Keys

Display	6 Digit 7 seg 0.40" Red LED Display
Key	PRG,RESET

Mechanical Characteristics

Mounting Type	Panel Mount
Dimension (HxWxD) mm	35.5 x 76.5 x 69
Panel Cutout (HxW) mm	30 x 71
Material Body	ABS
Terminal Screw Size	M3
Screw Torque (N.m)	0.5
Wire Gauge (AWG)	28-12
Weight (Approx) gms	Unpacked : 160 Packed : 190
Accessories	1 Pair of Mounting Clamps

Power Supply

Power Supply	100-270V AC,50/60Hz
---------------------	---------------------